


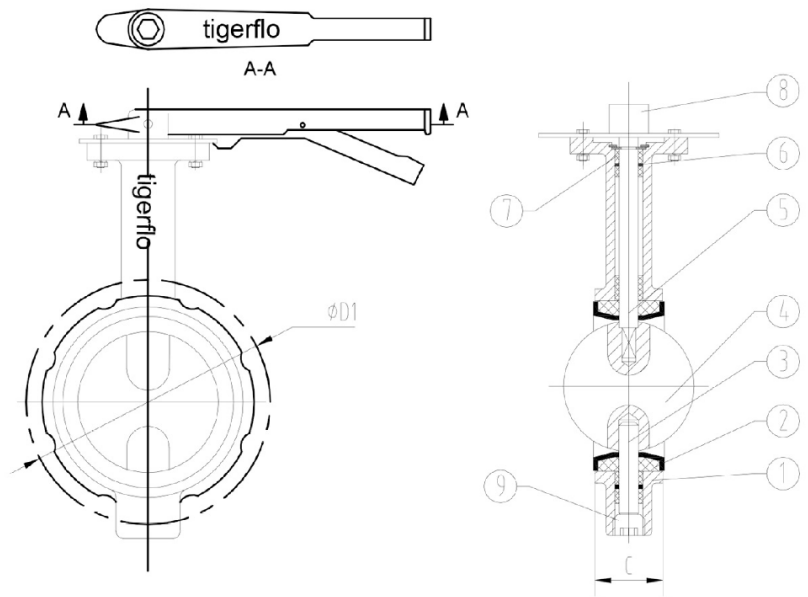

FEATURES & BENEFITS

- Suitable for various applications (liquids, gases, and slurries), check before use Butterfly Valve compatibility with fluids to be handled
- Heavy duty robust design and construction
- Low maintenance cost, easy for maintenance, parts available and replaceable

SPECIFICATION

Type	Wafer
Face to Face	API609, BS5155, DIN3202, ISO5752
Flange	DIN, BS, UNI, ISO, ANSI, AS, JIS
Mounting Flange	ISO5211
Working Pressure	PN16 (200PSI)
Applications in Various Industries	Water, Mining, Construction, Dewatering, Municipal, Wastewater, Agriculture, Slurry, Marine, Oilfield, Petrochemical, Paper, Pulp, Food & Beverages & various application

MAIN COMPONENTS MATERIAL

ITEM DESCRIPTION	MATERIAL	ITEM NUMBER
Body	DI	1
Seat	NBR	2
Lower Shaft	SS416	3
Disc	SSCF8	4
Upper Shaft	SS416	5
O-Ring	EPDM	6
Bushing	PTFE	7
Bolts	SS316	8

MODEL	SIZE		C	PN16	PN10	ANSI 150
	in	DN		D1	D1	D1
BFV-TF50NBR-SS	2	50	42	125	125	120
BFV-TF65NBR-SS	2.5	65	44	145	145	139
BFV-TF80NBR-SS	3	80	45	160	160	152
BFV-TF100NBR-SS	4	100	52	180	180	190
BFV-TF125NBR-SS	5	125	54	210	210	216
BFV-TF150NBR-SS	6	150	55	240	240	241
BFV-TF200NBR-SS	8	200	60	295	295	298
BFV-TF250NBR-SS	10	250	65	355	350	362